




Manufacturing Technology:




Balance




Straight





Tension




Dynamic Straightness



Dynamic Balancing

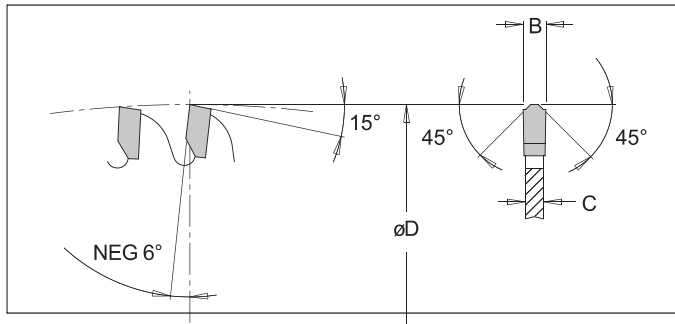

Saws for Non Ferrous Metal






Aluminum


For cutting aluminum sheets, tubing extrusions and other non ferrous metals such as copper, brass, lead and magnesium. For smooth cutting, use lots of lubricant and a clamping device. Note: The material must be clamped firmly to the table on both sides during cutting operation. The use of coolant is very important.

Tool no.	Dia.	Teeth	Kerf	Bore	Category
6 1/4-48 N/F	6 1/4"	48	.110" (2.8mm)	5/8"	S
7 1/4-48 N/F	7 1/4"	48	.110" (2.8mm)	5/8" ♦	S
7 1/4-58 N/F	7 1/4"	58	.110" (2.8mm)	5/8"	S
8-48 N/F	8"	48	.110" (2.8mm)	5/8"	S
8-64 N/F	8"	64	.110" (2.8mm)	5/8"	S
8.5-64 N/F	8 1/2"	64	.110" (2.8mm)	5/8"	S
9-60 N/F	9"	60	.110" (2.8mm)	5/8"	S
10-60 N/F	10"	60	.126" (3.2mm)	5/8"	S
10-80 N/F	10"	80	.126" (3.2mm)	5/8"	S
10-100 N/F	10"	100	.126" (3.2mm)	5/8"	S
12-72 N/F	12"	72	.126" (3.2mm)	1"	S
12-96 N/F	12"	96	.126" (3.2mm)	1"	S
*12-96 N/F-40	12"	96	.126" (3.2mm)	40mm + 4PH 12mm x 64CC	S
13-80 N/F-32	13"	80	.126" (3.2mm)	32mm	S
13-102 N/F	13"	102	.126" (3.2mm)	1"	S
13-102 N/F-32	13"	102	.126" (3.2mm)	32mm	S
14-84 N/F	14"	84	.126" (3.2mm)	1"	S
14-108 N/F	14"	108	.126" (3.2mm)	1"	S
15-100 N/F	15"	100	.110" (2.8mm)	1"	S
15-100 N/F-32	15"	100	.110" (2.8mm)	32mm + 2 PH	S
16-96 N/F	16"	96	.149" (3.8mm)	1"	S
16-120 N/F	16"	120	.149" (3.8mm)	1"	S
18-108 N/F	18"	108	.157" (4.0mm)	1"	S
18-120 N/F	18"	120	.157" (4.0mm)	1"	S
20-120 N/F	20" (500mm)	120	.173" (4.4mm)	1"	S
20-120 N/F-32	20" (500mm)	120	.157" (4.0mm)	32mm	S
20-120 N/FTHIN	20" (500mm)	120	.142" (3.6mm)	1"	S
*22-120 N/F-30	22"(550mm)	120	.173" (4.4mm)	30mm	S


- ♦ Diamond Knockout
- * For Scotchman model: CPO 315 HPA NF
- * For cutting solid materials, positive Hook.





Manufacturing Technology:



Balance



Straight

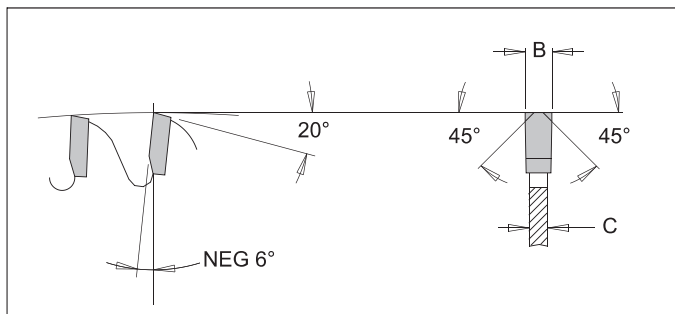

Grooving Saw Blade For Aluminum

Used for milling, clean up and grooving of aluminum welds and cutting out welding tacks. Used mainly in the boat building industry. Used with hand held grinder.

Tool no.	Dia.	Teeth	Kerf	Bore	Category
4-24 N/F	100mm	24	.154" (3.9mm)	5/8"	S
4-30 N/F	100mm	30	.154" (3.9mm)	5/8"	S
4 1/2-24 N/F	115mm	24	.154" (3.9mm)	7/8"	S
4 1/2-30 N/F	115mm	30	.154" (3.9mm)	7/8"	S

