

Snappy™ Countersink Set (with drills) & Individual Countersinks

Each Countersink has standard 1/4" HEX shank and snaps into the Quick Chuck for positive no-slip control. Countersink-Counterbore portion is made from stress proof steel accurately heat treated for prolonged life. 82° Countersink angle. Adjustable set screw for exact depth control. Countersinks are double fluted for sharp clean performance. 3/8" or 1/2" counterbore for standard Wood Plugs.



Tool no.	Description	Category
40030	Snappy™ 5 Pc Countersink Set (with drills). Snappy™ Premium Quality Countersink set covers the full range of screw sizes, from screw No. 4 to screw No. 12 inclusive. Sets include the following drills: 5/64", 3/32", 7/64", 1/8", 9/64"	SNP
43005	5/64" Drill bit and Countersink for Screw No. 4 in hard wood	SNP
43006	3/32" Drill bit and Countersink for Screw No. 6 in soft wood	SNP
43007	7/64" Drill bit and Countersink for Screw No. 6 in soft, Screw No. 8 in hard wood	SNP
43008	1/8" Drill bit and Countersink for Screw No. 8 in soft wood, Screw No. 10 in hard wood	SNP
43009	9/64" Drill bit and Countersink for Screw No. 10 in soft, Screw No. 12 in hard wood	SNP
43010	5/32" Drill bit and 1/2" Countersink for Screw No. 10 in soft, Screw No. 12 in hard wood	SNP

Snappy™ Quick Chuck Adapter & 3 Countersinks Set (with drills)




Tool no.	Description	Category
43400	Set includes Snappy™ Quick Chuck and 3 Countersinks with following drills: 7/64", 1/8", 9/64" For Screws No. 6 thru No. 12	SNP

Carbide Tipped Countersinks for Snappy™ Quick Chuck Adapter

Drill bit included. Countersinks snap in and out of the Snappy™ without a chuck key. Shanks are standard 1/4" HEX.

Tool no.	Drill Dia. d	Countersink Dia. D	L	Category
50564	5/64"	3/8"	2 1/8"	SNP
50332	3/32"	3/8"	2 1/8"	SNP
50764	7/64"	3/8"	2 1/8"	SNP
50018	1/8"	3/8"	2 1/8"	SNP
50964	9/64"	1/2"	2 1/8"	SNP

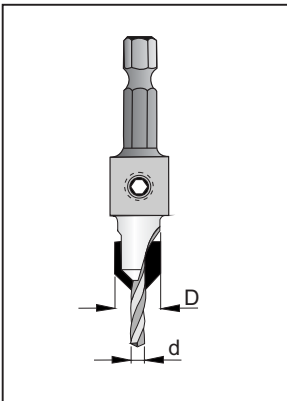

Machine Countersink

Precision 5 cutting edges, chatter free 90° countersink

Tool no.	Dia.	Shank	Length	Category
202-C-12	1/2" (12mm)	5/16" (8mm)	2" (50mm)	D
202-C-16	5/8" (16mm)	5/16" (8mm)	2" (50mm)	D
202-C-19	3/4" (19mm)	5/16" (8mm)	2" (50mm)	D

