


RIP Saw Blades


Designed to cut hard & soft wood. Has a flat tooth pattern with 20° hook (face) angle. Performs high speed ripping leaving a rough edge. Used in circular saw benches and multi rip saw machines.

Manufacturing Technology:



Balance

Straight






Tension

Solid Wood:
Along

Tool no.	Dia.	Teeth	Kerf	Bore	Category
8-14 RIP	8"	14	.118" (3.0mm)	5/8"	S
8-24 RIP	8"	24	.118" (3.0mm)	5/8"	S
9-24 RIP	9"	24	.118" (3.0mm)	5/8"	S
10-24 RIP	10"	24	.126" (3.2mm)	5/8"	S
*10-24 RIPX-A	10"	24	.094" (2.4mm)	5/8"	S
12-24 RIPX	12"	24	.126" (3.2mm)	1"	S
12-30 RIPX	12"	30	.126" (3.2mm)	1"	S
12-36 RIP	12"	36	.126" (3.2mm)	1"	S
12-36 RIP-80	12"	36	.126" (3.2mm)	80mm + 2KY	S
14-28 RIPX	14"	28	.138" (3.5mm)	1"	S
14-42 RIP	14"	42	.138" (3.5mm)	1"	S

*10° ATB tooth style

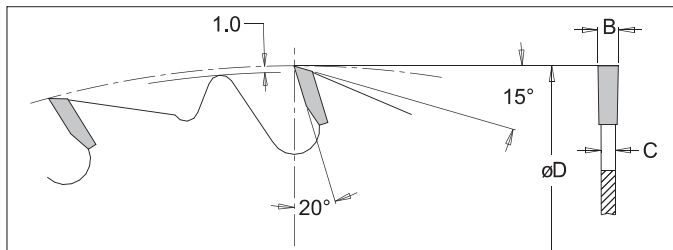

RIP Saw Blades with Chip Limitation


For ripping natural wood. Safety feature prevents kickback. Easy feed and faster cut. Added Cooling Holes for faster heat dispensing.

Manufacturing Technology:



Balance

Straight



Tension

Solid Wood:
Along

Tool no.	Dia.	Teeth	Kerf	Bore	Category
10-24 CL	10"	24	.126" (3.2mm)	5/8"	S
12-24 CL	12"	24	.126" (3.2mm)	1"	S
14-28 CL	14"	28	.138" (3.5mm)	1"	S
16-28 CL	16"	28	.138" (3.5mm)	1"	S